

# MYTHO-AUTO

## Tecnologia evoluta a servizio dell'uomo


● Avvolgitore automatico fuori linea con sistema di taglio e aggancio, semplice e affidabile.

● Automatic stand alone wrapping turntable with clamp and cutting system, simple and reliable.

● Banderoleuse automatique à table tournante hors ligne avec groupe pince et coupe, simple et fiable.

● Automatische Stretchwickler mit Klemm- und Schneidesystem, einfach und zuverlässig.

● Envolvedora de mesa giratoria automática fuera de línea con grupo pinza y corte film, simple y confiable.

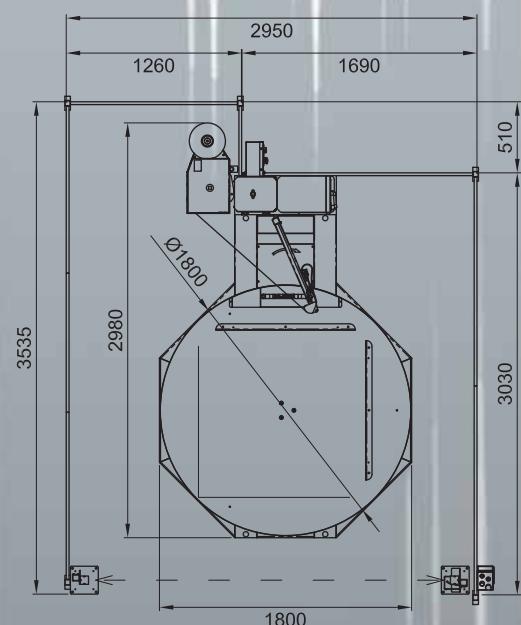



Facile da usare, 99 cicli di avvolgimento preimpostati e possibilità di programmare un numero illimitato di opzioni.

Easy to use, 99 pre-set wrapping cycles and the possibility of programming an unlimited number of options.

Utilisation facile, 99 programmes mémorisables comprenant un nombre important de cycles et fonctions pour résoudre les cas les plus difficiles.

Einfach zum Bedienen, 99 Vorprogrammierte Wickelprogramme mit unbegrenzten einstellbaren Parametern von Bedienungstafel.

Facil de usar, 99 ciclos de envoltura predispuesta y posibilidad de programar un número ilimitado de opciones.

#### Dati Tecnici

#### MYTHO-AUTO

#### Technical Characteristics

#### MYTHO-AUTO

Potenza totale installata	min. 1.2 Kw - max. 2.2 Kw	Total installed power	min. 1.2 Kw - max. 2.2 Kw
Tensione alimentazione standard	230V monofase - 50 Hz - 6A	Standard input voltage	230V - 1PH - 50 Hz - 6A
Protezione impianto elettrico e motori	IP 54	Electrical system and motors protection	IP 54
Dimensione max pallet	1000 x 1200 mm	Max pallet dimensions	1000 x 1200 mm
Altezza std pallet	2500 mm	Standard pallet height	2500 mm
Portata max	2000 Kg	Max capacity	2000 Kg
Diametro tavola	1800 mm	Table diameter	1800 mm
Velocità massima rotazione tavola	12 rpm	Maximum table rotation speed	12 rpm

#### Données Techniques

#### MYTHO-AUTO

#### Technische Daten

#### MYTHO-AUTO

Puissance totale installée	min. 1.2 Kw - max. 2.2 Kw	Gesamte Leistung	min. 1.2 Kw - max. 2.2 Kw
Tension alimentation standard	230V mono-phase - 50 Hz - 6A	Anschluss-Spannung	230V - 1PH - 50 Hz - 6A
Protection installation électrique et moteurs	IP 54	Elektroanlage und Motore Schutzart	IP 54
Dimensions maximum palette	1000 x 1200 mm	Max. Palettenabmessung	1000 x 1200 mm
Hauteur standard palette	2500 mm	Max. Standard Wickelhöhe	2500 mm
Portée maximum	2000 Kg	Max. Ladungsgewicht	2000 Kg
Diamètre de la table	1800 mm	Drehsteller Durchmesser	1800 mm
Vitesse de rotation table maxi	12 l/min.	Max. Drehgeschwindigkeit	12 Upm

#### Datos Técnicos

#### MYTHO-AUTO

Potencia total instalada	min. 1.2 Kw - max. 2.2 Kw		
Tension de alimentacion estandar	230V mono-phase - 50 Hz - 6A		
Proteccion montaje electrico y motores	IP 54		
Dimension max palet	1000 x 1200 mm		
Altura estandar palet	2500 mm		
Peso max	2000 Kg		
Diametro mesa	1800 mm		
Velocidad màxima rotaciòn de la mesa	12 rpm		



B.F INDUSTRIES

CONSTRUCTEUR DE PALETTISEUR  
ET FIN DE LIGNES AUTOMATISÉES

37 Impasse du Petit Prince  
69124 Colombier Saugnieu  
tél. 04.78.32.66.70 fax. 04.72.93.23.20  
[contact@bf-industries.fr](mailto:contact@bf-industries.fr)  
[www.bf-industries.fr](http://www.bf-industries.fr)